


## Product : Double Faced Tape #586

Sekisui #586 is developed for applying to oily materials. It has excellent adhesion to various kinds of adherends.

### Structure

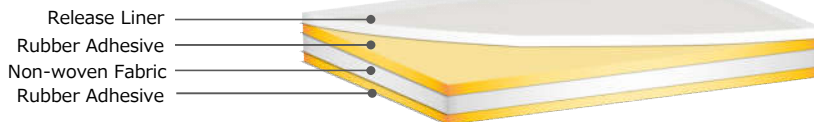

### Applications

- 1) For fixing oily adherends such as sealing materials (sponge and rubber).

### Features

- (1) #586 has superior adhesion to oily surfaces.  
(Actual adhesive strength will vary depending on the amount and type of oil. Please pre-test all applications.)
- (2) It also has strong adhesion to difficult adherends including polypropylene.
- (3) It adheres well to carved and angled surfaces.

### Standard Size

Property	Unit	#586E
Tape Thickness	mm	0.085
Standard Size (Width)	mm	1,020
Standard Size (Length)	M	50

※Please contact us for other available sizes.

### Properties

Property			Unit	#586	Method
90 degree Peeling Adhesion	SUS	23°C	N/25mm	19.6	Based on JIS Z 0237 (Old Version) Pressure: 2kg roller Peeling Speed: 300mm/min
Holding power	JIS 40°C holding power		mm	0.1	40°C / 1.0kg X 1hr

### Precautions

- 1) Please remove dirt, water, oil and other contaminants from the substrate's surface before use.
  - 2) Please avoid re-application, and leave it for several hours after applying it.
  - 3) Please avoid direct application on uneven or rough surfaces and body parts.
  - 4) Please avoid storage in places with high temperatures, high humidity, and direct sunlight.
  - 5) Please test it out on the surface first. If you have question about its use, please contact us.
- ※ The figures above are measured values and are not guaranteed values.

The spec and appearance may be changed without notice. Customers are responsible for judging if the tape can be used for their application.

**SEKISUI CHEMICAL CO., LTD.**

High Performance Plastics Company

Address;

2-10-4 Toranomon, Minato-ku, Tokyo 105-8566 JAPAN  
TEL: +81-3-6748-6447 FAX: +81-3-6748-6538